

Examination Lights

EXCEPTIONALLY BRIGHT LIGHT FOR EVERYDAY USE

HEINE Examination Lights incorporate the latest in illumination technology: Flexible halogen examination lights with innovative bulb technology for exceptional brightness.

The three different mounting options by wheeled stand, wall or clamp mounting provide ideal solutions for the daily practice environment.



HEINE HL 5000® Examination Light

Powerful halogen light



∴ Two flexible sections

∴ Exceptionally high light output

∴ 140,000 Lux at 30 cm

With an exceptionally high light output of 140,000 lux at a distance of 30 cm, the HL 5000 examination light is ideal for examining and recognizing small details. The flexible gooseneck construction provides a working radius of 120 cm. Three versions are available: wheeled stand, wall mounting, multi-purpose clamp.

- ∴ **Long lasting 12V/50W halogen bulb gives 140,000 Lux light output at 30 cm.** Very bright, white light.
- ∴ **Extremely compact illumination head.** No obstruction of view, ease of handling.
- ∴ **3 different mounting options: wall, table or wheeled stand.** Versatile.
- ∴ **Halogen bulb lasts at least 4,000 hours.** Economical.
- ∴ **Additional UV filter.** Increased safety during examination.
- ∴ **Solid construction with high specification 120 cm radius gooseneck design.** Super-wide radius of operation, easy to position, light stays put in any selected position.
- ∴ **Additional IR-Filter reduces heat.** More comfort for the patient and examiner.

HL 5000 examination light	12V/50W
on lightweight wheeled stand, polycarbonate base [01]	J-005.27.108
with wall mount [02]	J-005.27.102
with clamp mount [03]	J-005.27.104
Halogen spare bulb 12V/50W halogen [04]	J-005.27.111



120V is the standard mains voltage. If a different voltage is required, e. g. 230V, please specify when ordering.

HEINE HL 1200® Examination Light



- ∴ Two flexible sections
- ∴ Ultra slim head
- ∴ 90,000 Lux at 30cm

- ∴ **Ultra slim head.** More freedom of movement and an unobstructed view for the examiner.
- ∴ **Built in temperature filter.** Avoids patient discomfort.
- ∴ **Swivels through complete 180°.** Flexible and easy to position.
- ∴ **Exceeds all relevant quality standards.** Guaranteed protection for the patient even if a bulb fails.
- ∴ **“Stay put” construction of flexible section.** Adjust the light to virtually any position and it “stays put”, will not sag or droop.
- ∴ **Special non tip wheeled stand.** Resists tipping to improve safety in clinic and practice.
- ∴ **Long life 12V/20W lamp.** 4,000 hours bulb life.
- ∴ **90,000Lux light output at 30 cm.** Bright, white light.

HL 1200 examination light, 12V/20W	black	white
with wheeled stand, metal base [01]	J-005.27.068	J-005.27.067
with lightweight wheeled stand, polycarbonate base [02]	J-005.27.078	J-005.27.077
with additional multi-purpose clamp [03]	J-005.27.056	J-005.27.058
with wall mounting bracket, can also be fitted to opt. wheeled stand [04]	J-005.27.052	J-005.27.054
Halogen spare bulb 12V/20W halogen [05]	J-005.27.075	J-005.27.075




Wheeled stand (metal base) with mount for HL 1200 Light	Y-096.50.004
Wheeled stand (polycarbonate base) with mount for HL 1200 Light	Y-096.50.009
Mount for HL 1200 Light for wheeled stand	J-000.27.069



HEINE HKL® Universal Fiber Optic (F.O.) Examination Light

The ideal light for any doctor's practice. Provides light similar to daylight. Can be powered by any HEINE F.O. projector.

- ⋮ **Adjustable Diaphragm Aperture.** Wide range of spot sizes. Bright, even light. No temperature increase.
- ⋮ **Color temperature 3,800K.** "Daylight" illumination.
- ⋮ **Long, flexible arm "stays put" where required.** Very flexible to position with long reach arm.
- ⋮ **Slimline head.** Unobstructed view.
- ⋮ **Universal mounting.** Suits the practitioner's needs.
- ⋮ **Can be retro mounted to existing projectors.** Makes an examination light out of any projector.
- ⋮ **30,000 Lux light output at 20cm with projector HK7000.**
- ⋮ **Mounting options:**
 - on wheeled stand [01]
 - with clamp for table-top mounting (maximum 40 mm thick) [02]
 - with clamp for vertical mounting to a tube up to 40 mm dia. [03]
 - with clamp for mounting to square tube up to 40 mm dia. [04]
 - wall-mounting for HK7000 projector [05]




HKL Light	F.O.
on wheeled stand [01]	J-003.27.004
with clamp [02] [03] [04]	J-003.27.001
with wall-bracket [05]	J-003.27.002

Black clamp, only	J-000.27.010
White clamp, only	J-000.27.012
Base plate, only	J-000.27.011
Wheeled stand without base-plate	Y-096.50.001
Wheeled stand with base-plate	Y-096.50.002

*Special Order - 4 to 6 weeks delivery time.
 Please order the projector separately. See pages 154–155.

Light spot sizes

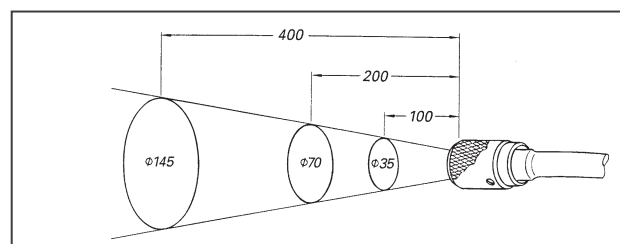

120V is the standard mains voltage. If a different voltage is required, e. g. 230V, please specify when ordering.